


SERIES 40

THIN FILM 1.2 & 4 WATT INFRA-RED EMITTERS

This IR source is a high emissivity thermal emitter which can be modulated at low frequencies. It is appropriate for use in lab or field instrumentation due to its long life and stable properties.

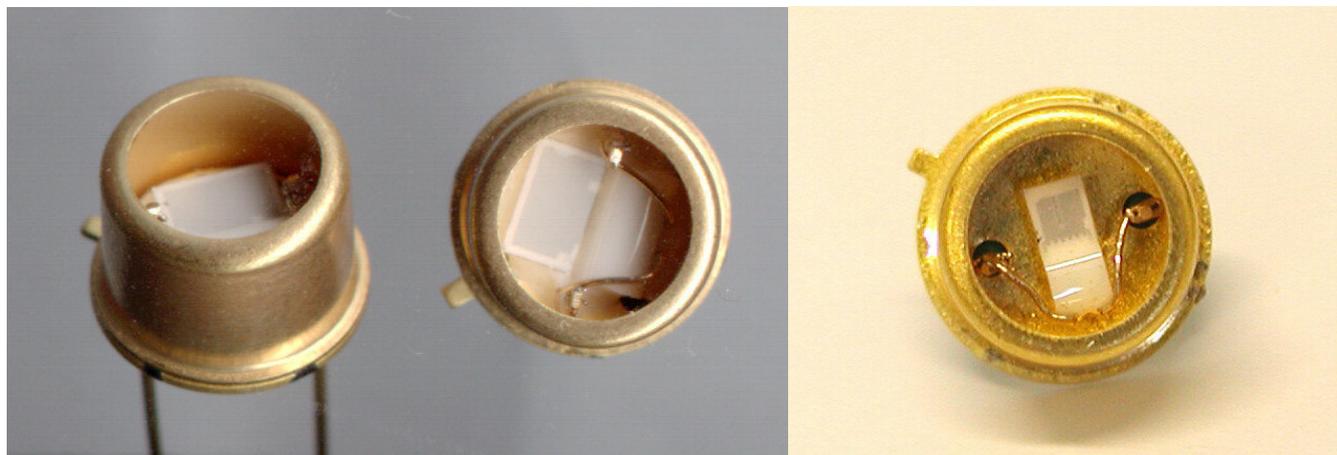

The IR source is based on a thin film which operates at approximately 600°C (875K) when powered with 35 V for the IR-40 and 13V for the IR-43. The radiating element is a 1.5µm film of precision laser trimmed resistance material which has a high emissivity in the infra-red spectral region. The element is permanently bonded to a flat substrate of alumina forming a fixed and stable platform. This contributes to a uniform radiating source.

Operation in a controlled or sealed atmosphere is not required. Due to the low thermal mass of these parts, they can be modulated at rates up to a few Hz. For higher modulation speeds, the Series 50 IR sources should be considered.

Part #	Description
IR-40NC	4W TO5 header no cap
IR-40	4W TO5 header with cap (as picture above)
IR-40S	4W TO5 header with cap and sapphire window

Part #	Description
IR-43NC	1.2W TO5 header no cap
IR-43	1.2W TO5 header with cap (as picture above)
IR-43S	1.2W TO5 header with cap and sapphire window

Temperature	600°C (875K)
Voltage	35.0 volts RMS (AC or DC)
Current	0.115 Amps
Active Area	3.5 x 2.5 mm
Modulation Rate	A few Hz
Lifetime	3+ years at 600°C, typical
Emissivity	0.8

Temperature	600°C (875K)
Voltage	13.0 volts RMS (AC or DC)
Current	0.090 Amps
Active Area	1.5 x 1.5 mm
Modulation Rate	A few Hz
Lifetime	3+ years at 600°C, typical
Emissivity	0.8

Scitec Instruments Ltd
 Bartles Industrial Estate
 North Street
 Redruth
 Cornwall TR15 1HR
 United Kingdom

t. +44 [0]1209 314608
 f. +44 [0]1209 314609
 f2. +44 [0]870 1600860
 i. www.scitec.uk.com
 e. scitec@scitec.uk.com

